

D-MAX WALL

NEW CONTINUOUS INSULATION SYSTEM - INSTALLED FROM THE INTERIOR SIDE!

Time Saving with Lower Overall Construction Costs




The new D-Max wall system is a new type of assembly that allows the installation of spray foam insulation from the interior of the building while managing the thermal bridging of the studs and the structure. Thus, the weather conditions and the access to the facades are no longer an obstacle to the progress of the projects. The planning, coordination and execution of the work are much simpler and faster. One of the main advantages of this assembly is that Heatlok HFO Pro and Heatlok HFO High Lift spray foam acts as insulation, air barrier and vapor barrier in a single application. The three main properties of the building envelope are provided by a single product. In addition, the D-Max wall allows a high performance assembly for effective thermal resistance and airtightness system with very thin walls. For these various reasons, construction is very fast, respects deadlines and is safer, which considerably reduces construction costs and accelerates building delivery.

D-Max Wall Assembly - A Proven Concept

The spray foam application is installed completely from the interior and will cut the thermal bridge of the studs by filling the gap between the exterior sheathing panel (exterior gypsum) and the studs. This gap is variable depending on the insulation values to be achieved and is created with a Z-bar. Z-bars are installed directly on the exterior face of the studs before the sheathing is installed. The spacing and size of the Z-bars vary depending on the type of building and cladding. A reference chart has been validated by an engineering firm as well as the **NFPA 285 compliance**.

Significant Benefits

- Maximum speed of installation, requiring fewer workers and reducing construction costs.
- 1 product 3 functions: insulation, air barrier and vapor barrier. 1 single application instead of 3 products and 3 applications.
- Significant heating savings for winter construction.
- No scaffolding or hydraulic elevators. Less machinery, therefore reduced rental costs, logistics and risk of accidents.
- Product applied completely from the interior: valuable time saving, no delay due to weather conditions.
- Insulation of the building possible as the walls are built.
- Interior furring is optional compared to conventional construction, electrical systems can be installed before or after insulation. No holes in the vapor barrier.
- Meets fireblocking requirements for concealed wall spaces. IBC Section 718.2.
- Spray application regardless of the temperature or wind (down to 15°F).
- Better acoustical performance than a traditional assembly. Tested on site.
- Can be installed as walls go up.

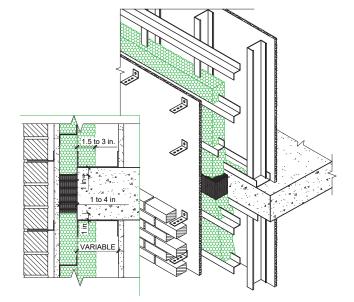



Enables Time Saving Project Sequencing



Example of productivity of the D-Max system. The cladding is installed from the ground floor to the third floor, the interior insulation is installed on levels 3 and 4 and the structure is poured on levels 6 and 7.

Certifications

The D-Max wall assembly has successfully passed the NFPA 285 test in accordance with the IBC requirements in section 2603.5.5. The product is also Greenguard Gold certified, which means that it is low VOC emission to ensure better indoor air quality.

- 1. NFPA 285 compliant
- 2. ASTM E96 Water Vapor Permeance
- 3. ASTM E2178 Air Permeance
- 4. GREENGUARD GOLD Certification Air Quality
- 5. Firestop certification by Hilti, 3M and STI
- 6. LEED V4: EPD-HPD-ACV
- 7. UES ER-565 & ICC-ES ESR-4073
- 8. ASTM E966 / ASTM E1332 Sound Attenuation:
- Apparent Indoor-Outdoor Transmission Class AOITC 45

Support

Huntsman Building Solutions' technical team is available to review design details, specifications, and provide on-site quality control services to tailor the D-Max wall assembly to the specific needs of each project and ensure quality installation.

For more information, please call 817-640-4900 or email us at architect@huntsmanbuilds.com

D-Max Wall Assembly Step by Step





Spray Heatlok HFO Pro and Heatlok HFO High Lift according to the specified thickness.



Installation of electrical systems. (This can be completed before or after the spray foam installation)



Installation of the interior finish.

Over 40 Projects Successfully Installed in North America



Nicolas Project



Ilot St. Charles Project



K Building Project



Saint-PhilippeProject



3315 E Division St Arlington, TX 76011 Phone: 817.640.4900, 866.437.0223 www.huntsmanbuildingsolutions.com

AN: 21.00180 | REV: 01.27.23