

HUNTSMAN

BUILDING SOLUTIONS

**Industry Leading R-Value,
Air/Vapor Barrier and
Water Resistive Barrier
in a Single Product.**



25% Renewable
& Recycled
Product


HEATLOK[®] HFO[™] PRO

CLOSED-CELL SPRAY FOAM



HEATLOK[®] HFO[™] PRO

CLOSED-CELL SPRAY FOAM

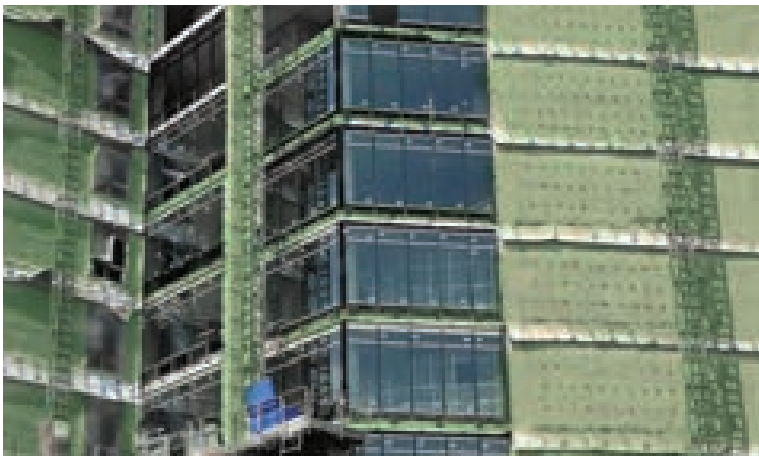

PRODUCT FEATURES

- R-value = 7.4 @ 1 inch R-11 @ 1.5 inches
- 25% recycled and renewable content
- Superior adhesion and compressive strength
- Passes NFPA 285 with brick, stone, masonry, metal and aluminum exterior.
- Class II vapor retarder at 1 inch
- Exceeds ASHRAE 90.1 insulation requirements at 1.5 inches
- ABAA Certified

COMBINES THE STRENGTHS OF HEATLOK WITH THE 4TH GENERATION BLOWING AGENT.

Heatlok[®] HFO[™] Pro, with an R-value of 7.4 at 1 inch, is designed as a continuous insulation solution with an ultra-low global warming potential blowing agent. Tested and certified as an air barrier, vapor retarder, water barrier and thermal insulation.

Heatlok HFO Pro leverages Honeywell's Solstice[®] Liquid Blowing Agent technology, which has a GWP of 1, 99.9% lower than traditional blowing agents, and is in compliance with the Montreal Protocol designed to lower the use of global warming gases.

R-value	Smoke Developed = 350-400
ASTM E-84	Class A Flame Spread Index = 12 Report 565
Air Barrier Assemblies and WRB	ASTM E2357 and ASTM E331 AC71 Compliant
Fire Testing	NFPA 285 Compliant with brick, stone, metal and aluminum
Certification	IAPMO UES Evaluation Report 565



EXTERIOR WALL SYSTEM COMPONENT
IN ACCORDANCE WITH NFPA 285
SEE BUILDING MATERIALS DIRECTORY
ALSO CLASSIFIED IN ACCORDANCE WITH ASTM D1189
FILE R39899